

Quarter-circle protective cage

Fact:

The door is located in front of stair tread no. 1.

The door frame is screwed to the staircase's central tube.

The grating, H3 20x2, is secured to the staircase railing's balusters.

The grating panels, 1750x485, are fitted in stepwise along the staircase's incline.

The cage's external radius: The staircase's radius + 80 mm.


Surface Treatment: Hot dip galvanized in accordance with class SS-EN ISO 1461.

Lock: ASSA 565, falling latch lock. (Also prepared for hook lock.)

Door handles on both sides.

Knob on the inside.

Cover on the outside (can be changed to cylinder).

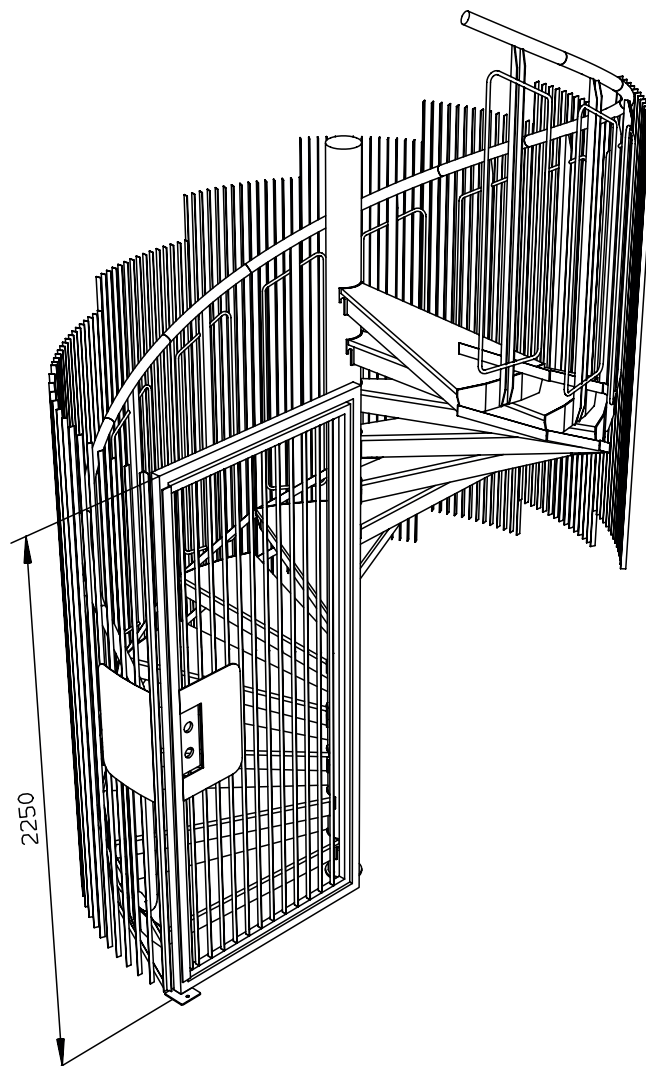

e4-24344-1